

Date: 202*

Ref No. **

To	
Attn	
Email	
Tel	

QUOTATION

1. Description : Heat pump dryer
2. Payment : 50% Advance, 50% before shipment
3. Shipment : 120 days upon receipt of advance payment
4. Package : Heat pump – Plywood boxes
5. Validity : Two (02) weeks
6. Machine site transportation cost, custom duty and clearing charges included.
Installation charge not included.

Product Name	Quantity	Unit	Price (LKR)
Heat pump Dryer (DT300HD)	1	Set	

BANK DETAILS

Beneficiary name : UNIGLOBE TRADING (PVT) LTD

Beneficiary bank : Commercial Bank of Ceylon PLC, Rajagiriya, Sri Lanka

Beneficiary account Number : 1000 542309

Bank code : 7056

Branch code : 062

SWIFT code - CCEYLKXX



+94 77 082 6863



343/13, Ranwala, Kegalle



sales@uniglobe-trading.com

Specifications	
MODEL	UNIT
POWER INPUT	11KW
POWER SUPPLY	380V 3PH(50/60HZ)
RATED CURRENT	380V 22A
HEATING CAPACITY	21KW
COOLING CAPACITY	15.6KW
DEHUMIDITY	24L/H
REFRIGERANT	R134A 5KG
COMPRESSOR	COPELAND(ZW34KA) 2PC
FAN	DRYTECH BRAND 250W 16PCS
MAX TEMPERATURE	75°C
WORKING CONDITION	-30°C-50°C
MAX EXHAUSE PRESSURE	3.0MPa
NOISE	75dB(A)
ELECTRIC HEATER	9KW
BLOWING TYPE	HORIZONTAL BLOW TYPE
DIMENSION OF DRYER	L1650xW856xH1280mm DOUBLE DRYERS
DEMENSION OF CHAMBER	L7050xW2190xH2200mm
TROLLEY MATERIAL	STAINLESS STEEL(1MM))
TRAY MATERIAL	304 STAINLESS STEEL(0.5MM))
CHAMBER	POLYURETHANE WITH COATED METAL(0.4MM METAL). POLYURETHANE THICKNESS 100MM
TEMPERATURE INSIDE CHAMBER	10-75°C
CONTROL PANEL	NO OF TEMPERATURE SENSORS: 1 HUMIDITY SENSORS: 1 AUTOMATION : YES



Item list					
Item	Product Name	Specification		Photo	Quantity
1	Heat pump	3HP(380V/3PH)	Total power input 11.0KW		2
2	Fan	250W			16
3	Fan frame	L1225xW250xH1995mm			2
4	Chamber	L7050xW2190xH2200mm			1
	Door	L1000xW1870mm			
	Maintenance door	W500xL850mm			
	Partition board	L5330xH2000mm			
5	1pc Trolley and 16pcs trays	L870xW610xH1750mm			16

Free accessories				
Item	Accessories name	Specification	Q'ty	Photo
1	Lampshade	φ200mm	1 pc	
2	Rubber pad	φ100X50mm	4 pcs	
3	Rivet clipper	400mm	1 pc	
4	Rivet	4X25mm	1 box	
5	Screw	25mm	1 box	
6	Fix Partition board	30mmX30mm	2 pcs	
7	Allen key	8 mm	1 pc	
8	Silicon gel	/	1 box	
9	Silicon gel tool	/	1 pc	
10	Electric heater	9KW	2 pc	


Trolley and Trays

Product	Photo	Specification(mm)	Material
1pc Trolley + 16pcs trays	 The photo shows two stainless steel trolleys standing upright and one stainless steel tray lying flat. The trolleys have multiple horizontal layers and are on wheels. The tray is rectangular with a grid pattern.	Trolley dimension: L870xW610xH17 50mm Tray dimension: L800xW600mm Each trolley 16 layers, total 16pcs trays for one trolley	STAINLESS STEEL

Working Principle

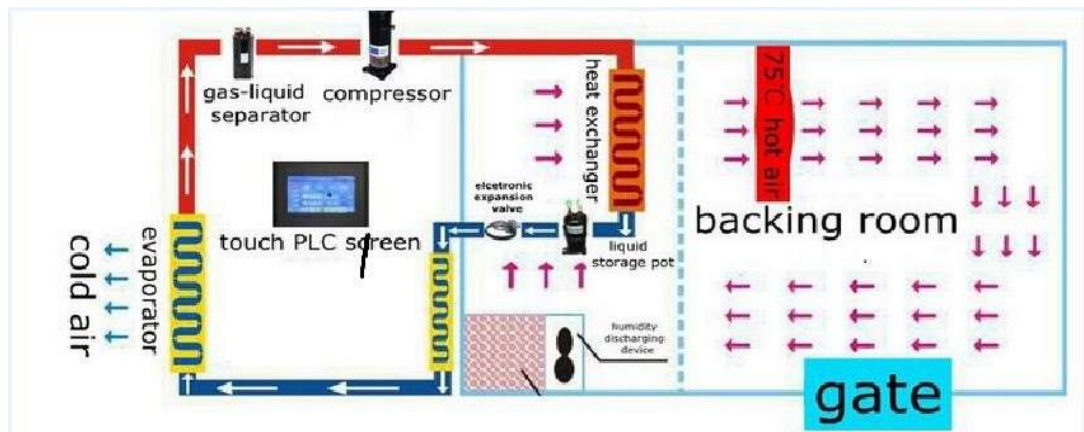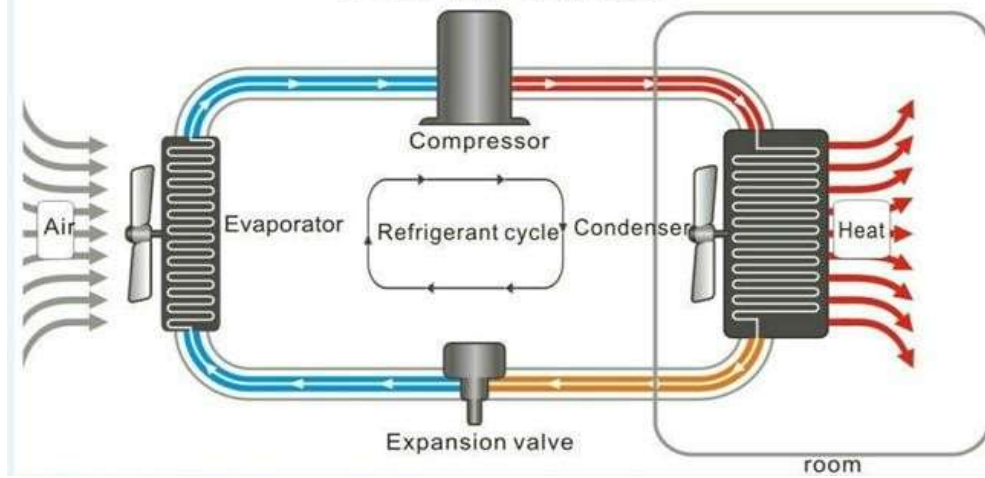

Constructure

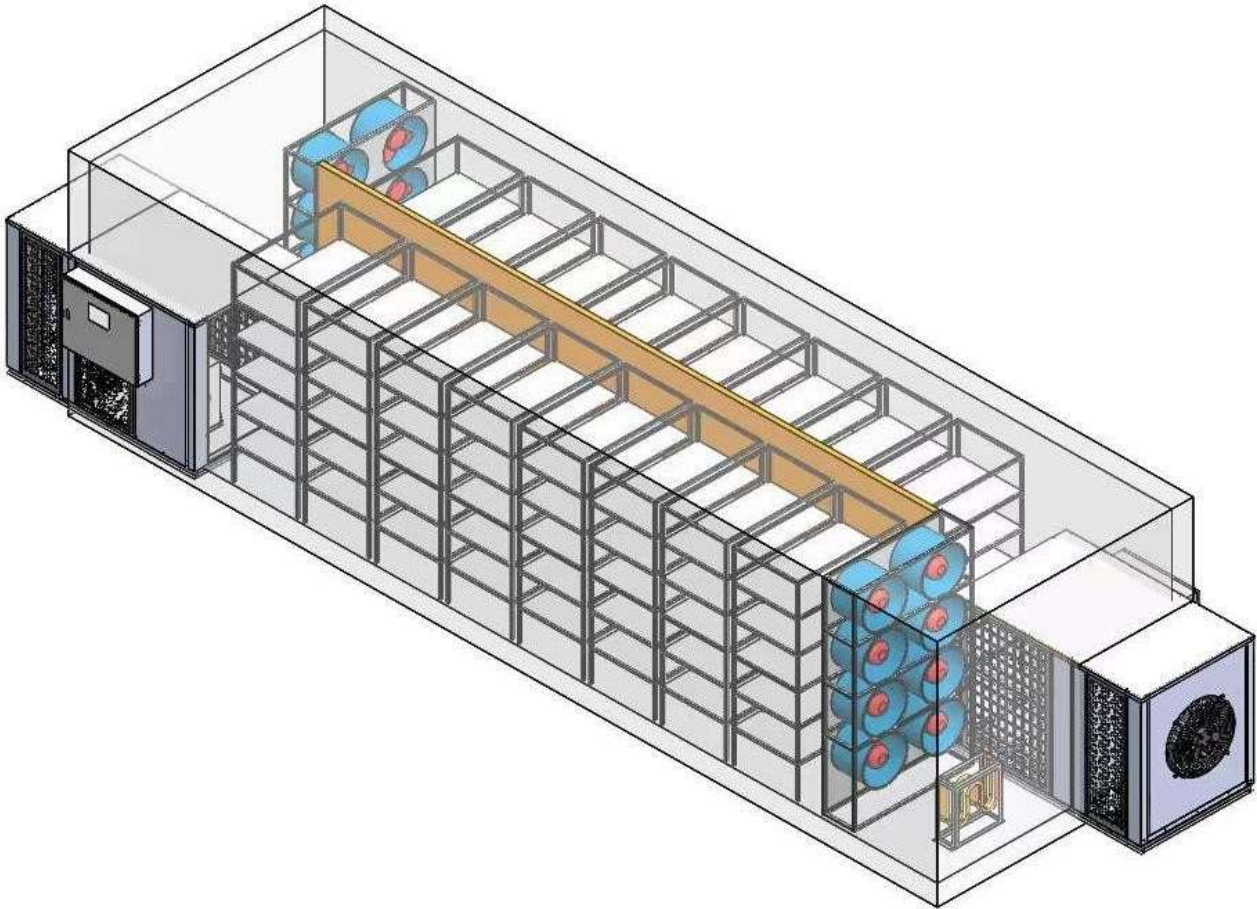

Specification for the fan



Kiln drying high temperature & high humidity axial fan

Type	GKF/G3D-2	Specification	300 mm
Volume Flow	2950~1600 m³/h	Pressure rise	120~180 Pa
Power	0.25 kW	Speed	2900 r/min
Voltage	220 V	Serial No	
Y/M/D	2021.03		

Drytech(Guangzhou) Technology Co.,Ltd.